

# PCA<sup>®</sup> Spray Faucet Attachment - 0.5 gpm max Pressure Compensating Regular Size



flow, stop and go<sup>®</sup>

## Features and Benefits

- ▶ Watercolours<sup>®</sup> design: Color coding to identify flow rate and stream pattern.
- ▶ Provides a non-splashing, non-aerated spray
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Integrated anti-liming Honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Also compatible with regular and vandal proof M22 and M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

## Certifications

ANSI/NSF 61  
Meets ASME A112.18.1M and CSA B125 requirements

## Thread & Part Number

Part #	Designation	Thread Size
10 235	Insert only	
10 200	Regular male	15/16"-27
10 210	Regular female	55/64"-27
10 220	Regular dual thread	15/16"-27 x 55/64"-27
10 204	Vandal proof regular male	15/16"-27
10 214	Vandal proof regular female	55/64"-27
10 225	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

### Packaging:



Inserts *1pc (bag), 6pcs (tube), 50pcs (bag)*  
Reg. male/female/dual thread *1pc (bag), 6pcs (tube), 50pcs (tray)*  
Reg. vandal proof male/female/dual thread *1pc (bag), 6pcs (tube), 40pcs (tray)*

other product combinations available

## Color Code

Dome	Flow Regulator	Basket
Clear	Lime Green	Light Gray

## Flow Rate Curve

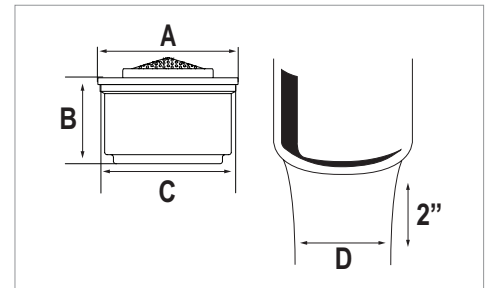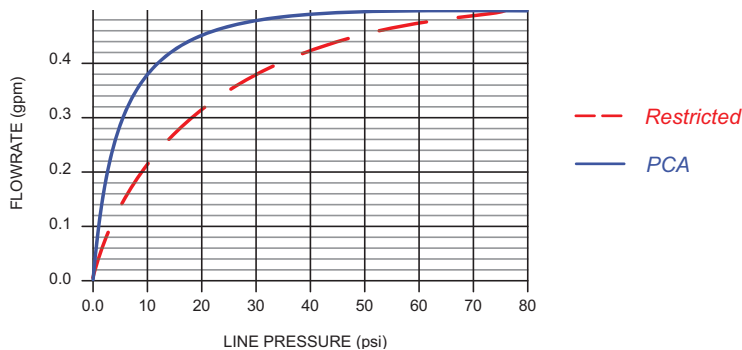

## Dimensions

No	mm	In
A	20.85	.821
B	13.00	.512
C	19.95	.785
D	≈ 25	≈ 1

## Housings



## Technical Data

Materials: Body Acetal  
O-ring EPDM  
Washer EPDM  
Wetted surface area: 2831.3 mm<sup>2</sup>

Continuous		Short-term (5 minutes max.)	
max. 50 °C	max. 120 °F	max. 70 °C	max. 160 °F
90 psi max.	6 bar max.	125 psi max.	8.5 bar max.