

PCA® Perlator®

Laminar Stream - 1.0 gpm max

Pressure Compensating Junior Size



flow, stop and go®

Features and Benefits

- ▶ Watercolours design: color coding to identify flow rate and stream pattern.
- ▶ Provides a splash-free stream crystal clear, non aerated stream.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Integrated anti-liming Honeycomb® replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.

Certifications

ANSI/NSF 61
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements
WaterSense



Thread & Part Number

Part #	Designation	Thread Size
11 865	Insert only	
11 870	Regular male	15/16"-27
11 880	Regular female	55/64"-27
11 874	Regular dual thread	15/16"-27 x 55/64"-27
11 884	Vandal proof regular male	15/16"-27

Packaging:



Inserts *1pc (bag), 6pcs (tube), 50pcs (bag)*
Jr. male/female *1pc (bag), 6pcs (tube), 50pcs (tray)*
Jr. vandal proof male/female *1pc (bag), 6pcs (tube), 50pcs (tray)*

other product combinations available

Color Code

Dome	Flow Regulator	Basket
White	Blue	Light Gray

Flow Rate Curve

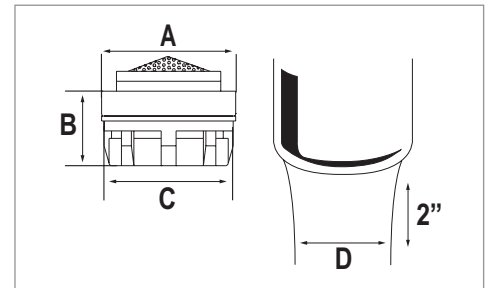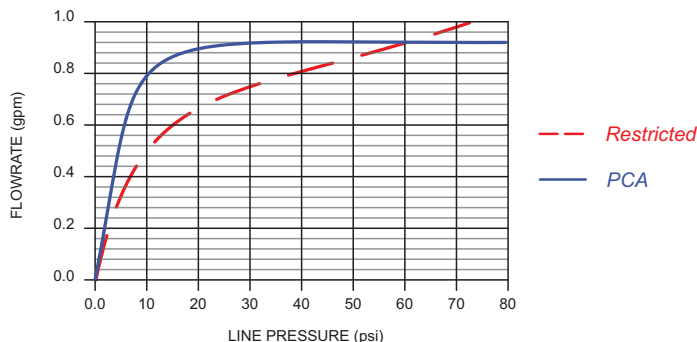

Dimensions

No	mm	In
A	18.2	.717
B	10.21	.402
C	17.4	.685
D	≈ 11	≈ 7/16

Housings



Technical Data

Materials: Body Acetal
O-ring EPDM
Washer EPDM
Wetted surface area: 4796.0 mm²

Continuous		Short-term (5 minutes max.)	
max. 50 °C	max. 120 °F	max. 90 psi max.	max. 6 bar max.
max. 70 °C	max. 160 °F	max. 125 psi max.	max. 8.5 bar max.