

PCA® Perlator®

Laminar Stream - 1.75 gpm max

Pressure Compensating Junior Size



flow, stop and go®

Features and Benefits

- ▶ Watercolours design: color coding to identify flow rate and stream pattern.
- ▶ Provides a splash-free crystal clear, non aerated stream.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Integrated anti-liming Honeycomb® replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.

Certifications

ANSI/NSF 61
 ASME A112.18.1M and CSA B125
 Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
14 965	Insert only	
14 970	Junior male	13/16"-27
14 980	Junior female	3/4"-27
14 974	Vandal proof junior male	13/16"-27
14 984	Vandal proof junior female	3/4"-27

Packaging:



Inserts *1pc (bag), 6pcs (tube), 50pcs (bag)*
 Jr. male/female *1pc (bag), 6pcs (tube), 50pcs (tray)*
 Jr. vandal proof male/female *1pc (bag), 6pcs (tube), 50pcs (tray)*

other product combinations available

Color Code

Dome	Flow Regulator	Basket
White	Light Blue	Dark Gray

Flow Rate Curve

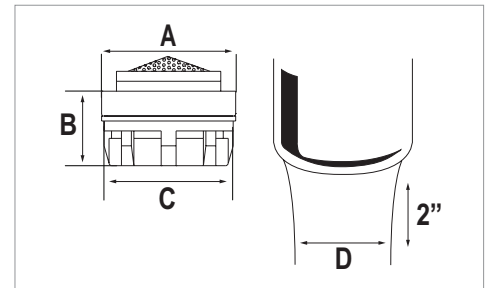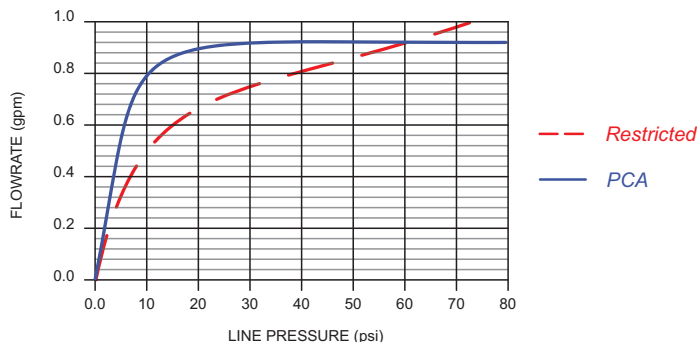

Dimensions

No	mm	In
A	18.2	.717
B	10.21	.402
C	17.4	.685
D	≈ 11	≈ 7/16

Housings



Technical Data

Materials: Body Acetal
 O-ring EPDM
 Washer EPDM
 Wetted surface area: 4664.00 mm²

Continuous		Short-term (5 minutes max.)	
max. 50 °C	max. 120 °F	max. 70 °C	max. 160 °F
90 psi max.	6 bar max.	125 psi max.	8.5 bar max.