

Perlator®

Laminar Stream - 1.5 gpm

Flow Restricted Junior Size




flow, stop and go®

Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free crystal clear, non-aerated stream.
- ▶ Integrated anti-liming Honeycomb® replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.

Certifications

ANSI/NSF 61
 ASME A112.18.1M and CSA B125
 Meets **CALGreen** requirements
 WaterSense

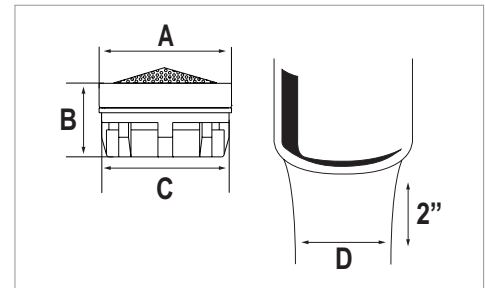

Thread & Part Number

Part #	Designation	Thread Size
12 865	Insert only	
12 870	Junior male	13/16" -27
12 880	Junior female	3/4" -27
12 874	Vandal proof junior male	13/16" -27
12 884	Vandal proof junior female	3/4" -27


Packaging:

Inserts 1pc (bag), 6pcs (tube), 50pcs (bag)
 Jr. male/female 1pc (bag), 6pcs (tube), 50pcs (tray)
 Jr. vandal proof male/female 1pc (bag), 6pcs (tube), 50pcs (tray)
 other product combinations available

Color Code

Dome	Ring	Basket
Green	White	Light Gray

Flow Rate Curve

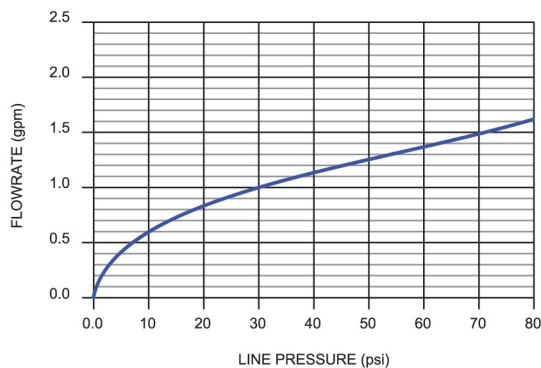

Dimensions

No	mm	In
A	18.20	.717
B	10.21	.402
C	17.4	.685
D	≈ 11	≈ 7/16

Housings



Technical Data

Materials: Body Acetal
 Washer EPDM
 Wetted surface area: 4773.93 mm²

Continuous		Short-term (5 minutes max.)	
max. 50 °C	max. 120 °F	max. 70 °C	max. 160 °F
90 psi max.	6 bar max.	125 psi max.	8.5 bar max.

NEOPERL®, Inc., Waterbury, CT • Tel: 203-756-8437 • Fax: 203-574-2107 • www.neoperl.com