

PCA[®] Spray with AMP (Antimicrobial Protection) Faucet Attachment - 0.5 gpm max Pressure Compensating Regular Size




flow, stop and go[®]

Features and Benefits

- ▶ With built in Agion's[®] antimicrobial product protection.
- ▶ Watercolours[®] design: color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Also compatible with regular and vandal proof M22 and M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

Certifications

ANSI/NSF 61
Meets ASME A112.18.1M and CSA B125 requirements

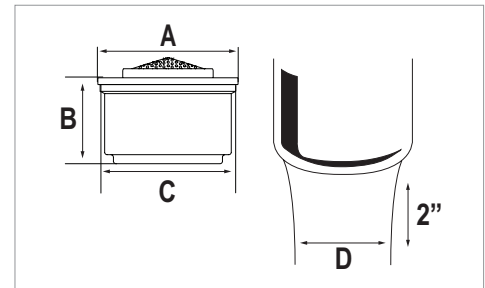

Thread & Part Number

Part #	Designation	Thread Size
14 035	Insert only	
14 000	Regular male	15/16"-27
14 010	Regular female	55/64"-27
14 020	Regular dual thread	15/16"-27 x 55/64"-27
14 004	Vandal proof regular male	15/16"-27
14 014	Vandal proof regular female	55/64"-27
14 026	Vandal proof regular dual thread	15/16"-27 x 55/64"-27


Packaging:

Inserts *1pc (bag), 6pcs (tube), 50pcs (bag)*
 Reg. male/female/dual thread *1pc (bag), 6pcs (tube), 50pcs (tray)*
 Reg. vandal proof male/female/dual thread *1pc (bag), 6pcs (tube), 40pcs (tray)*
 other product combinations available

Color Code

Dome	Flow Regulator	Basket
Light Gray	Olive	Light Gray

Flow Rate Curve

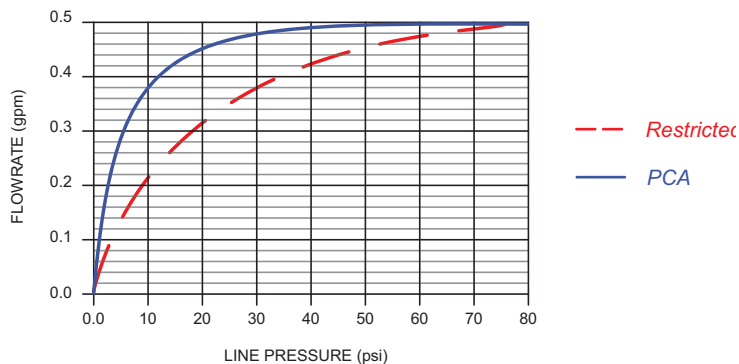

Dimensions

No	mm	In
A	20.87	.822
B	13.00	.512
C	19.95	.785
D	≈ 25	≈ 1

Housings



Technical Data

Materials: Body Acetal with Agion[®]
 O-ring EPDM
 Washer EPDM
 Wetted surface area: 2597.0 mm²

Continuous		Short-term (5 minutes max.)	
max. 50 °C	max. 120 °F	max. 70 °C	max. 160 °F
90 psi max.	6 bar max.	125 psi max.	8.5 bar max.

NEOPERL[®], Inc., Waterbury, CT • Tel: 203-756-8437 • Fax: 203-574-2107 • www.neoperl.com