

Careguard®

Laminar Stream - 1.5 gpm max

Flow Restricted Regular Size



flow, stop and go®

Features and Benefits

- ▶ With built in Agion antimicrobial protection.
- ▶ Provides a splash-free stream, crystal clear (non-aerated stream).
- ▶ Saves water and energy (1.5 gpm).
- ▶ Unique screenless 100% plastic Cascade® construction prevents lime build up.
- ▶ Recommended for use in medical facilities to prevent airborne bacteria from entering the water stream.
- ▶ Also compatible with regular and vandal proof M22 and M24 metric housings.
- ▶ Available housing finishes: chrome, polish brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

Certifications

ANSI/NSF 61
 ASME A112.18.1M and CSA B125
 Meets **CALGreen** requirements
 WaterSense



Thread & Part Number

| Part # | Designation | Thread Size |
|--------|----------------------------------|-----------------------|
| 12 035 | Insert only | |
| 12 000 | Regular male | 15/16"-27 |
| 12 010 | Regular female | 55/64"-27 |
| 12 020 | Regular dual thread | 15/16"-27 x 55/64"-27 |
| 12 004 | Vandal proof regular male | 15/16"-27 |
| 12 014 | Vandal proof regular female | 55/64"-27 |
| 12 026 | Vandal proof regular dual thread | 15/16"-27 x 55/64"-27 |

Packaging:



Inserts *1pc (bag), 6pcs (tube), 50pcs (bag)*
 Reg. male/female/dual thread *1pc (bag), 6pcs (tube), 50pcs (tray)*
 Reg. vandal proof male/female/dual thread *1pc (bag), 6pcs (tube), 40pcs (tray)*

other product combinations available

Color Code

| Dome | Ring | Basket |
|------|------|--------|
| Gray | Gray | Gray |

Flow Rate Curve

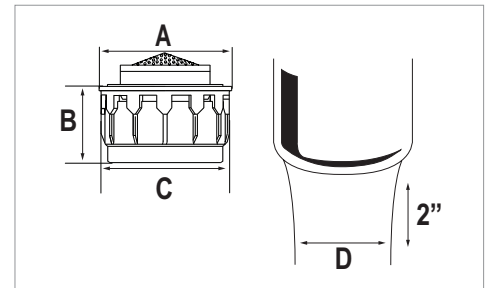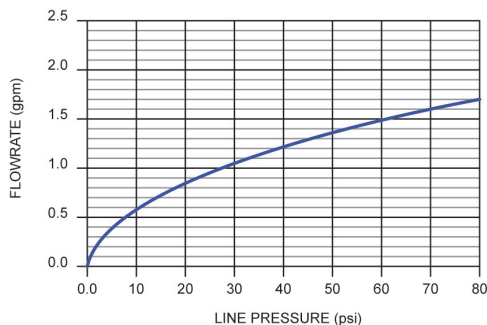

Dimensions

| No | mm | In |
|----|-------|-------|
| A | 20.90 | .823 |
| B | 11.95 | .470 |
| C | 20.00 | .787 |
| D | ≈ 13 | ≈ 1/2 |

Housings



Technical Data

Materials: Body Acetal
 Washer EPDM
 Wetted surface area: 5002.20 mm²

| Continuous | | Short-term (5 minutes max.) | |
|-------------|-------------|-----------------------------|--------------|
| max. 50 °C | max. 120 °F | max. 70 °C | max. 160 °F |
| 90 psi max. | 6 bar max. | 125 psi max. | 8.5 bar max. |