

PCA Care®

Laminar Stream - 1.5 gpm max

Pressure Compensating Regular Size




flow, stop and go®

Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides a splash free crystal clear non-aerated stream.
- ▶ Unique screenless 100% plastic Cascade® construction inhibits lime build up.
- ▶ Recommended for use in medical facilities to prevent airborne bacteria from entering the water stream.
- ▶ Also compatible with regular and vandal proof M22 and M24 metric housing.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel, and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

Certifications

Meets ANSI/NSF 61 requirements
 ASME A112.18.1M and CSA B125
 Meets **CALGreen** requirements
 WaterSense

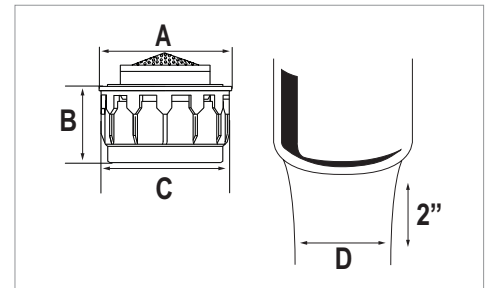

Thread & Part Number

Part #	Designation	Thread Size
10 535	Insert only	
10 500	Regular male	15/16"-27
10 510	Regular female	55/64"-27
10 520	Regular dual thread	15/16"-27 x 55/64"-27
10 504	Vandal proof regular male	15/16"-27
10 514	Vandal proof regular female	55/64"-27
10 526	Vandal proof regular dual thread	15/16"-27 x 55/64"-27


Packaging:

Inserts *1pc (bag), 6pcs (tube), 50pcs (bag)*
 Reg. male/female/dual thread *1pc (bag), 6pcs (tube), 50pcs (tray)*
 Reg. vandal proof male/female/dual thread *1pc (bag), 6pcs (tube), 40pcs (tray)*
 other product combinations available

Color Code

Dome	Diffuser	Flow Regulator	Basket
Orange	Gray	Orange	Gray

Flow Rate Curve

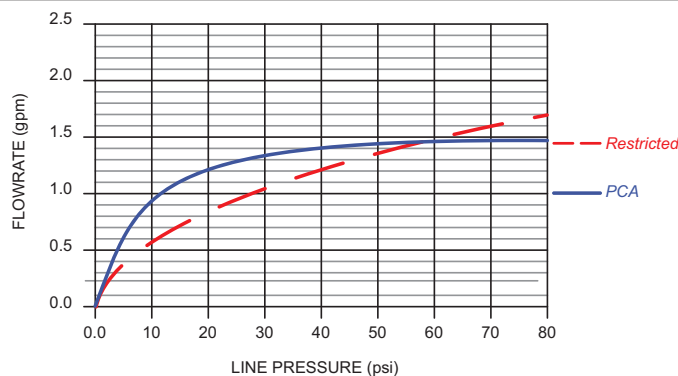

Dimensions

No	mm	In
A	20.95	.825
B	12.00	.472
C	20.05	.789
D	≈ 13	≈ 1/2

Housings



Technical Data

Materials: Body Acetal
 O-ring EPDM
 Washer EPDM
 Wetted surface area: 4797.51 mm²

Continuous		Short-term (5 minutes max.)	
max. 50 °C	max. 120 °F	max. 70 °C	max. 160 °F
90 psi max.	6 bar max.	125 psi max.	8.5 bar max.