PCA® Care® with AMP (Antimicrobial Product Protection) Laminar Stream - 1.0 gpm max

Pressure Compensating Regular Size



flow, stop and go®

Features and Benefits

- With built in Agion's® antimicrobial product protection.
- Watercolours® design: Color coding to identify flow rate and stream pattern.
- Provides a splash-free stream, crystal clear (non-aerated stream).
- Unique screenless 100% plastic cascade construction prevents lime build-up.
- Pressure compensating for constant flow from 20 to 80 psi.
- Recommended for use in medical facilities to prevent airborne bacteria from entering the water stream.
- Also compatible with regular and vandal proof M22 and M24 metric housing.
- Available housing finishes: unplated, chrome and PVD.
- Laser marked housings: Custom logo and/or statutory marking.

Certifications

ANSI/NSF 61

Meets ASME A112.18.1M and CSA B125 requirements




Meets CALGreen requirements

Options Available			
Part #	Designation		
A5.4170.0	Insert only		
40.1858.613	Regular male 15/16"-27		
40.1858.623	Regular female 55/64"-27		
40.1858.673	Regular dual thread 15/16"-27 / 55/64"-27		
40.1858.723	Vandal proof regular male 15/16"-27		
40.1858.733	Vandal proof regular female 55/64"-27		
40.1858.763	Vandal proof dual thread		
BX.399C.1	Regular vandal key		

^{*}Other combinations also available

Color Code				
Dome	Flow Regulator	Basket		
Light Gray	Blue	Light Gray		

Flow Rate Curve

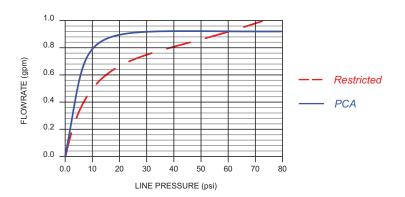



Dimensions				
No	mm	In		
Α	11.95	.470		
В	20.00	.787		
۲	~ 13	~ 1/2		



Technical Data				
Materials:	Body	Acetal with Agion®		
	O-ring	EPDM		
	Washer	EPDM		
Max temperature:		150°F		
Max pressure:		125 psi		
Wetted surface area:		5901.00 mm ²		